

# > RLA

## AIR-WATER CHILLERS AND HEAT PUMPS FOR OUTDOOR INSTALLATION



### Available range

#### Unit type

IR	Chiller
IP	Heat pump (reversible on the refrigerant side)
BR	Chiller Brine
BP	Heat pump Brine (reversible on the refrigerant side)

#### Version

VB	Base version
VD	Desuperheater version
VR	Total recovery version

#### Acoustic setting up

AB	Base setting up
AS	Low noise setting up
AX	eXtra low noise setting up

#### Source temperature level

M	Medium temperature level
A	High temperature level

### Unit description

This series of air-water chillers and heat pumps satisfies the cooling and heating requirements of residential plants of medium-large size.

All the units are suitable for outdoor installation and can be applied to fan coil plants, radiant floor plants and high efficiency radiators plants.

The refrigerant circuit, contained in a compartment protected from the air flow to simplify the maintenance operations, is equipped with scroll compressors mounted on damper supports, brazed plate heat exchanger, electronic expansion valve, reverse cycle valve, dehydrator filter, axial fans with safety protection grilles, finned coil made of copper pipes

and aluminium louvered fins with sub-cooling section. The circuit is protected by a safety gas valve, high and low pressure switches and differential pressure switch on the plate heat exchanger. The plate heat exchanger and all the hydraulic pipes are thermally insulated in order to avoid condensate generation and to reduce thermal losses.

All the units can be equipped with variable speed fans control that allows the units to operate with low outdoor temperatures in cooling and high outdoor temperature in heating and permits to reduce noise emissions in such operating conditions.

The low noise acoustic setting up (AS) is obtained, starting from the base setting up (AB), reducing the rotational speed of the fans and mounting sound jackets on the compressors and the technical compartment is clad with soundproofing material of suitable thickness.

The eXtra low noise acoustic setting up (AX) is obtained, starting from the low noise setting up (AS), further reducing the rotational speed of the fans and using finned coil with bigger surface.

All the units are supplied with a management and control electrical panel containing general switch, phase presence and correct sequence controller, microprocessor controller with display and all the other electrical components with IP54 minimum protection degree.

All the units are accurately built and individually tested in the factory. Only electric and hydraulic connections are required for installation.

### Options

[Storing and pumping module](#) available in the configurations :

- storage tank arranged as buffer on the flow or as primary-secondary buffer
- 1 or 2 pumps
- standard or high head pump

[Refrigerant circuit pressures visualization](#)

- high and low pressure gauges
- high and low pressure transducers

[High temperature thermostat](#)

[Compressor starting](#)

- standard (contactors)
- soft starter

[Fans control](#)

- on-off control
- modulating control (condensation / evaporation control)

[Compressor power factor correction](#)

[Electrical load protection](#)

- fuses
- thermal magnetic circuit breakers

[Coil condensate tray](#)

### Accessories

[Rubber vibration dampers](#)

[Spring vibration dampers](#)

[Coil protection grilles](#)

[Tank antifreeze electrical heater](#)

[Remote control](#)

[Modbus serial interface on RS485](#)

[Programmer clock](#)

[Phase sequence and voltage controller](#)

[Water flow switch](#)

[Victaulic hydraulic fittings](#)

**NET NOMINAL performances - Standard plants - EUROVENT certified data**

IR	Base setting up (AB)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4		
A35W7	Cooling capacity	161	178	199	228	255	289	323	368	409	kW	
	Power input	56,2	62,7	70,9	80,4	90,7	103	115	130	146	kW	
	EER	<b>2,86</b>	<b>2,84</b>	<b>2,81</b>	<b>2,84</b>	<b>2,81</b>	<b>2,81</b>	<b>2,81</b>	<b>2,81</b>	<b>2,83</b>	<b>2,80</b>	W/W
	ESEER	<b>3,84</b>	<b>3,81</b>	<b>3,79</b>	<b>3,82</b>	<b>3,79</b>	<b>3,80</b>	<b>3,79</b>	<b>3,80</b>	<b>3,80</b>	<b>3,79</b>	W/W
	Water flow rate	7,74	8,55	9,60	11,0	12,3	14,0	15,6	17,7	19,7	l/s	
	Pressure drops	51	51	58	57	60	64	54	58	58	kPa	
IR	Low noise setting up (AS)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4		
A35W7	Cooling capacity	155	171	191	219	245	277	311	353	393	kW	
	Power input	59,2	66,1	75,0	85,2	95,5	109	121	137	154	kW	
	EER	<b>2,62</b>	<b>2,59</b>	<b>2,55</b>	<b>2,57</b>	<b>2,57</b>	<b>2,54</b>	<b>2,57</b>	<b>2,58</b>	<b>2,55</b>	W/W	
	ESEER	<b>3,85</b>	<b>3,80</b>	<b>3,77</b>	<b>3,80</b>	<b>3,79</b>	<b>3,76</b>	<b>3,78</b>	<b>3,80</b>	<b>3,76</b>	W/W	
	Water flow rate	7,45	8,22	9,22	10,6	11,8	13,4	15,0	17,0	18,9	l/s	
	Pressure drops	47	47	53	53	56	58	50	53	54	kPa	
IR	eXtra low noise setting up (AX)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4		
A35W7	Cooling capacity	151	167	187	214	240	272	304	346	385	kW	
	Power input	59,8	66,9	76,0	86,4	96,6	111	123	138	157	kW	
	EER	<b>2,53</b>	<b>2,50</b>	<b>2,46</b>	<b>2,48</b>	<b>2,48</b>	<b>2,45</b>	<b>2,47</b>	<b>2,51</b>	<b>2,45</b>	W/W	
	ESEER	<b>3,90</b>	<b>3,85</b>	<b>3,82</b>	<b>3,84</b>	<b>3,86</b>	<b>3,82</b>	<b>3,82</b>	<b>3,88</b>	<b>3,81</b>	W/W	
	Water flow rate	7,26	8,03	9,03	10,3	11,6	13,1	14,6	16,7	18,5	l/s	
	Pressure drops	45	45	51	50	54	56	47	51	51	kPa	
IP	Base setting up (AB)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4		
A35W7	Cooling capacity	154	171	192	215	244	275	310	357	397	kW	
	Power input	55,4	61,8	69,6	78,5	89,9	102	113	129	144	kW	
	EER	<b>2,78</b>	<b>2,77</b>	<b>2,76</b>	<b>2,74</b>	<b>2,71</b>	<b>2,70</b>	<b>2,74</b>	<b>2,77</b>	<b>2,76</b>	W/W	
	ESEER	<b>3,72</b>	<b>3,70</b>	<b>3,72</b>	<b>3,68</b>	<b>3,65</b>	<b>3,65</b>	<b>3,66</b>	<b>3,72</b>	<b>3,73</b>	W/W	
	Water flow rate	7,41	8,22	9,27	10,4	11,8	13,3	14,9	17,2	19,2	l/s	
	Pressure drops	47	47	54	51	56	57	49	54	55	kPa	
A7W45	Heating capacity	169	191	215	240	273	308	345	395	439	kW	
	Power input	56,8	64,0	72,3	81,2	92,7	104	116	132	147	kW	
	COP	<b>2,98</b>	<b>2,98</b>	<b>2,97</b>	<b>2,96</b>	<b>2,94</b>	<b>2,96</b>	<b>2,97</b>	<b>2,99</b>	<b>2,99</b>	W/W	
	Water flow rate	8,03	9,03	10,2	11,4	12,9	14,6	16,3	18,7	20,8	l/s	
Pressure drops	55	57	65	62	66	69	59	64	65	kPa		
IP	Low noise setting up (AS)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4		
A35W7	Cooling capacity	148	164	185	206	234	265	298	343	382	kW	
	Power input	58,3	65,2	73,6	86,4	94,7	107	123	136	152	kW	
	EER	<b>2,54</b>	<b>2,52</b>	<b>2,51</b>	<b>2,38</b>	<b>2,47</b>	<b>2,48</b>	<b>2,42</b>	<b>2,52</b>	<b>2,51</b>	W/W	
	ESEER	<b>3,72</b>	<b>3,69</b>	<b>3,69</b>	<b>3,51</b>	<b>3,64</b>	<b>3,63</b>	<b>3,55</b>	<b>3,73</b>	<b>3,70</b>	W/W	
	Water flow rate	7,12	7,88	8,89	9,94	11,3	12,8	14,3	16,5	18,4	l/s	
	Pressure drops	43	44	49	47	51	53	45	50	51	kPa	
A7W45	Heating capacity	162	183	206	230	262	296	331	379	422	kW	
	Power input	53,5	60,3	68,2	76,6	87,3	99	110	125	140	kW	
	COP	<b>3,03</b>	<b>3,03</b>	<b>3,02</b>	<b>3,00</b>	<b>3,00</b>	<b>2,99</b>	<b>3,01</b>	<b>3,03</b>	<b>3,01</b>	W/W	
	Water flow rate	7,69	8,65	9,75	10,9	12,4	14,0	15,7	17,9	20,0	l/s	
Pressure drops	50	52	59	56	61	64	54	59	60	kPa		
IP	eXtra low noise setting up (AX)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4		
A35W7	Cooling capacity	145	161	181	203	229	259	291	335	374	kW	
	Power input	59,0	66,1	74,6	84,4	95,8	109	122	137	153	kW	
	EER	<b>2,46</b>	<b>2,44</b>	<b>2,43</b>	<b>2,41</b>	<b>2,39</b>	<b>2,38</b>	<b>2,39</b>	<b>2,45</b>	<b>2,44</b>	W/W	
	ESEER	<b>3,79</b>	<b>3,75</b>	<b>3,75</b>	<b>3,71</b>	<b>3,70</b>	<b>3,69</b>	<b>3,69</b>	<b>3,79</b>	<b>3,77</b>	W/W	
	Water flow rate	6,98	7,74	8,70	9,75	11,0	12,5	14,0	16,1	18,0	l/s	
	Pressure drops	42	42	47	45	48	51	43	48	49	kPa	
A7W45	Heating capacity	161	181	204	228	259	293	328	374	417	kW	
	Power input	51,8	58,5	66,2	74,5	84,6	95,6	106	121	135	kW	
	COP	<b>3,11</b>	<b>3,09</b>	<b>3,08</b>	<b>3,06</b>	<b>3,06</b>	<b>3,06</b>	<b>3,09</b>	<b>3,09</b>	<b>3,09</b>	W/W	
	Water flow rate	7,64	8,60	9,65	10,8	12,3	13,9	15,5	17,7	19,7	l/s	
Pressure drops	50	52	58	55	60	63	53	58	58	kPa		

Data declared according to EN 14511. The values are referred to units without options and accessories.  
**EER** (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit  
**COP** (Coefficient Of Performance) = ratio of the total heating capacity to the effective power input of the unit

**ESEER** (European Seasonal Energy Efficiency Ratio)  
 = Unit in **A CLASS**.

**A35W7** = source : air in 35°C d.b. / plant : water in 12°C out 7°C  
**A35W18** = source : air in 35°C d.b. / plant : water in 23°C out 18°C  
**A7W45** = source : air in 7°C d.b. 6°C w.b. / plant : water in 40°C out 45°C  
**A7W35** = source : air in 7°C d.b. 6°C w.b. / plant : water in 30°C out 35°C

### Acoustic performances

Base setting up (AB)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4	
Sound power level <sup>(E)</sup>	91	92	92	92	93	94	94	95	95	dB(A)
Sound pressure level at 1 meter	72	73	73	73	74	75	74	75	75	dB(A)
Sound pressure level at 5 meters	64	65	65	65	66	67	67	68	68	dB(A)
Sound pressure level at 10 meters	59	60	60	60	61	62	62	63	63	dB(A)
Low noise setting up (AS)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4	
Sound power level <sup>(E)</sup>	85	86	86	86	87	88	88	89	89	dB(A)
Sound pressure level at 1 meter	66	67	67	67	68	69	68	69	69	dB(A)
Sound pressure level at 5 meters	58	59	59	59	60	61	61	62	62	dB(A)
Sound pressure level at 10 meters	53	54	54	54	55	56	56	57	57	dB(A)
eXtra low noise setting up (AX)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4	
Sound power level <sup>(E)</sup>	82	83	83	83	84	85	85	86	86	dB(A)
Sound pressure level at 1 meter	63	64	64	64	65	66	65	66	66	dB(A)
Sound pressure level at 5 meters	55	56	56	56	57	58	58	59	59	dB(A)
Livello di pressione sonora a 10 metri	50	51	51	51	52	53	53	54	54	dB(A)

(E): EUROVENT certified data

The acoustic performances are referred to units operating in cooling mode at nominal conditions A35W7.

Unit placed in free field on reflecting surface (directional factor equal to 2).

The sound power level is measured according to ISO 9614 standard.

The sound pressure level is calculated according to ISO 3744 and is referred to a distance of 1/5/10 metres from the external surface of the unit.

### Technical data

Unit	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4	
Power supply	400 - 3 - 50									V-ph-Hz
Compressor type	scroll									-
N° compressors / N° refrigerant circuits	4 / 2									n°
Plant side heat exchanger type	stainless steel brazed plates									-
Source side heat exchanger type	finned coil									-
Fans type	axial									-
N° fans	4			6			8			n°
Tank volume	325						710			l
Hydraulic fittings	3" VICTAULIC						4" VICTAULIC			-

### Electrical data

Standard unit	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4	
<b>FLA</b> - Full load current at maximum tolerated conditions	140	151	177	193	217	243	269	314	335	A
<b>FLI</b> - Full load power input at maximum tolerated conditions	76	87	107	118	133	148	163	186	200	kW
<b>MIC</b> - Maximum instantaneous current of the unit	283	340	347	355	379	469	495	510	558	A
<b>MIC SS</b> - Maximum instantaneous current of the unit with soft starter options	213	250	263	271	295	354	380	404	438	A
Unit with high head modulating pump	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4	
<b>FLA</b> - Full load current at maximum tolerated conditions	149	160	187	203	227	256	282	327	357	A
<b>FLI</b> - Full load power input at maximum tolerated conditions	81	91	113	124	139	156	171	194	212	kW
<b>MIC</b> - Maximum instantaneous current of the unit	292	348	357	365	389	482	508	524	580	A
<b>MIC SS</b> - Maximum instantaneous current of the unit with soft starter options	222	258	273	281	305	368	394	417	460	A

### Operative range

Temperature	Unit type	Cooling		Heating		
		min	max	min	max	
Outdoor air inlet temperature	IR, BR, IP, BP	-10*	52**	-10	40*	(°C)
Water outlet temperature	IR, IP	5	25	30	55	(°C)
Water outlet temperature	BR, BP	-12	5	30	55	(°C)
Water outlet temperature (VD)	IR, BR, IP, BP	30	70	30	70	(°C)
Water outlet temperature (VR)	IR, BR	30	55	-	-	(°C)

\* with fans modulating control option (condensation / evaporation control)

\*\* with ATC outdoor high temperature protection function

## VD and VR versions

These units allow to recover the heating power, otherwise wasted on air, through an additional heat exchanger.

The **Desuperheater Version (VD)** allow the hot water production at temperatures between 30 and 70°C through the partial heat recovery of the condensation heat.

The **Total Recovery Version (VR)** allows the cold water production and, at the same time, the hot water production at temperatures between 30 and 55°C through the total recovery of the condensation heat.

### Desupeheater Version (VD) - NET NOMINAL performances

IR	Base setting up (AB)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4	
A35W7 - W45	Cooling capacity	167	185	207	237	264	300	336	382	425	kW
	Total power input	55,0	61,2	69,3	78,5	88,7	101	112	127	143	kW
	<b>EER</b>	<b>3,04</b>	<b>3,01</b>	<b>2,99</b>	<b>3,02</b>	<b>2,98</b>	<b>2,97</b>	<b>3,00</b>	<b>3,01</b>	<b>2,98</b>	W/W
	<b>HRE</b>	<b>3,90</b>	<b>3,89</b>	<b>3,87</b>	<b>3,91</b>	<b>3,85</b>	<b>3,85</b>	<b>3,90</b>	<b>3,88</b>	<b>3,86</b>	W/W
	Water flow rate	8,05	8,89	10,0	11,4	12,8	14,5	16,2	18,4	20,5	l/s
	Water pressure drop	55	55	63	62	65	68	58	62	63	kPa
	Heating recovery capacity	47,2	53,4	61,2	70,3	76,6	88,7	99,9	110,8	126,6	kW
	Water flow rate recovery	2,25	2,55	2,93	3,36	3,66	4,24	4,77	5,29	6,05	l/s
	Water pressure drop recovery	5	7	8	10	13	16	16	21	25	kPa

IP	Base setting up (AB)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4	
A35W7 - W45	Cooling capacity	160	177	200	224	253	286	322	371	413	kW
	Total power input	54,1	60,4	67,9	76,6	87,8	99	111	126	140	kW
	<b>EER</b>	<b>2,96</b>	<b>2,94</b>	<b>2,94</b>	<b>2,92</b>	<b>2,89</b>	<b>2,88</b>	<b>2,91</b>	<b>2,95</b>	<b>2,96</b>	W/W
	<b>HRE</b>	<b>3,82</b>	<b>3,81</b>	<b>3,83</b>	<b>3,82</b>	<b>3,75</b>	<b>3,76</b>	<b>3,81</b>	<b>3,83</b>	<b>3,85</b>	W/W
	Water flow rate	7,70	8,55	9,64	10,8	12,2	13,8	15,5	17,9	19,9	l/s
	Water pressure drop	51	51	58	55	59	62	53	59	59	kPa
	Heating recovery capacity	46,5	52,7	60,1	68,8	76,1	87,5	98,9	110	124	kW
	Water flow rate recovery	2,22	2,52	2,87	3,29	3,64	4,18	4,73	5,25	5,91	l/s
	Water pressure drop recovery	5	6	8	10	13	16	16	20	24	kPa

### Total Recovery Version (VR) - NET NOMINAL performances

IR	Base setting up (AB)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4	
A35W7 - W45	Cooling capacity	169	186	209	239	267	303	339	386	429	kW
	Total power input	47,3	53,5	61,6	70,7	77,2	89,5	100	111	127	kW
	<b>EER</b>	<b>3,56</b>	<b>3,48</b>	<b>3,39</b>	<b>3,38</b>	<b>3,46</b>	<b>3,39</b>	<b>3,38</b>	<b>3,46</b>	<b>3,37</b>	W/W
	<b>HRE</b>	<b>8,08</b>	<b>7,91</b>	<b>7,75</b>	<b>7,71</b>	<b>7,87</b>	<b>7,72</b>	<b>7,71</b>	<b>7,87</b>	<b>7,69</b>	W/W
	Water flow rate	8,13	8,98	10,1	11,5	12,9	14,6	16,4	18,6	20,7	l/s
	Water pressure drop	56	57	64	63	66	69	59	64	64	kPa
	Heating recovery capacity	214	237	268	306	340	388	434	492	550	kW
	Water flow rate recovery	10,2	11,3	12,8	14,6	16,2	18,5	20,7	23,5	26,3	l/s
	Water pressure drop recovery	45	43	45	45	47	49	49	51	51	kPa

Data declared according to **EN 14511**. The values are referred to units without options and accessories.

**EER** (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit

**HRE** (Heat Recovery Efficiency) = ratio of the total capacity of the system (heating plus cooling capacity) to the effective power input

**A35W7 - W45** = source : air in 35°C d.b. / plant : water in 12°C out 7°C / Recovery : water in 40°C out 45°C


## CONTROL SYSTEM

The units are equipped with a controller designed to ensure energy saving and unit efficiency. Available functions :

- ATC outdoor high temperature protection function
- Dynamic defrost
- Sound management
- Climatic control in heating and in cooling mode
- Double set point function
- Demand limit
- Integrative heating
- Remote stand by
- Remote cooling-heating



## DIMENSIONS - MINIMUM OPERATING AREA - WEIGHT

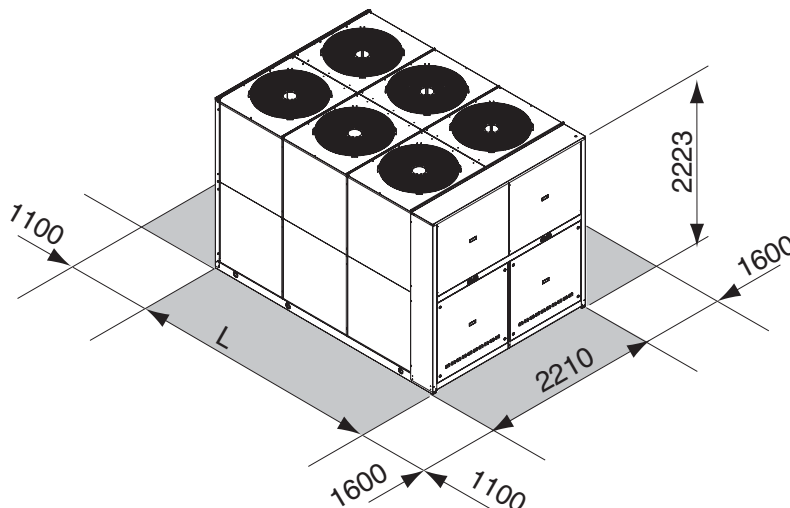

	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4	
L	3164	3164	3164	3164	3164	3164	4097	4097	4097	mm
Operating maximum weight*	2441	2633	2829	3005	3069	3096	3790	3907	3980	kg

\* Weight refers to the unit IP with tank and pumping module 2 pumps.

# > RLA HE

## AIR-WATER CHILLERS AND HEAT PUMPS FOR OUTDOOR INSTALLATION



### Available range

#### Unit type

IR	Chiller
IP	Heat pump (reversible on the refrigerant side)
BR	Chiller Brine
BP	Heat pump Brine (reversible on the refrigerant side)

#### Version

VB	Base version
VD	Desuperheater version
VR	Total recovery version

#### Acoustic setting up

AB	Base setting up
AS	Low noise setting up
AX	eXtra low noise setting up

#### Source temperature level

M	Medium temperature level
A	High temperature level

### Unit description

This series of air-water chillers and heat pumps satisfies the cooling and heating requirements of residential plants of medium-large size.

All the units are suitable for outdoor installation and can be applied to fan coil plants, radiant floor plants and high efficiency radiators plants.

The refrigerant circuit, contained in a compartment protected from the air flow to simplify the maintenance operations, is equipped with scroll compressors mounted on damper supports, brazed plate heat exchanger, electronic expansion valve, reverse cycle valve, dehydrator filter, axial fans with safety protection grilles, finned coil made of copper pipes

and aluminium louvered fins with sub-cooling section. The circuit is protected by a safety gas valve, high and low pressure switches and differential pressure switch on the plate heat exchanger. The plate heat exchanger and all the hydraulic pipes are thermally insulated in order to avoid condensate generation and to reduce thermal losses.

All the units can be equipped with variable speed fans control that allows the units to operate with low outdoor temperatures in cooling and high outdoor temperature in heating and permits to reduce noise emissions in such operating conditions.

The low noise acoustic setting up (AS) is obtained, starting from the base setting up (AB), reducing the rotational speed of the fans and mounting sound jackets on the compressors and the technical compartment is clad with soundproofing material of suitable thickness.

The eXtra low noise acoustic setting up (AX) is obtained, starting from the low noise setting up (AS), further reducing the rotational speed of the fans and using finned coil with bigger surface.

All the units are supplied with a management and control electrical panel containing general switch, phase presence and correct sequence controller, microprocessor controller with display and all the other electrical components with IP54 minimum protection degree.

All the units are accurately built and individually tested in the factory. Only electric and hydraulic connections are required for installation.

### Options

Storing and pumping module available in the configurations :

- storage tank arranged as buffer on the flow or as primary-secondary buffer

- 1 or 2 pumps

- standard or high head pump

Refrigerant circuit pressures visualization

- high and low pressure gauges
- high and low pressure transducers

High temperature thermostat

Compressor starting

- standard (contactors)
- soft starter

Fans control

- on-off control
- modulating control (condensation / evaporation control)

Compressor power factor correction

Electrical load protection

- fuses
- thermal magnetic circuit breakers

Coil condensate tray

### Accessories

Rubber vibration dampers

Spring vibration dampers

Coil protection grilles

Tank antifreeze electrical heater

Remote control

Modbus serial interface on RS485

Programmer clock

Phase sequence and voltage controller

Water flow switch

Victaulic hydraulic fittings

**NET NOMINAL performances - Standard plants - EUROVENT certified data**

IR	Base setting up (AB)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	
A35W7	Cooling capacity	172	191	212	237	267	304	340	387	kW
	Power input	52,7	58,0	65,4	74,1	83,6	95	106	122	kW
	<b>EER</b>	<b>3,26</b>	<b>3,29</b>	<b>3,24</b>	<b>3,20</b>	<b>3,19</b>	<b>3,20</b>	<b>3,21</b>	<b>3,17</b>	W/W
	<b>ESEER</b>	<b>4,57</b>	<b>4,61</b>	<b>4,54</b>	<b>4,48</b>	<b>4,47</b>	<b>4,48</b>	<b>4,49</b>	<b>4,44</b>	W/W
	Water flow rate	8,22	9,13	10,13	11,3	12,8	14,5	16,2	18,5	l/s
	Pressure drops	39	36	38	39	40	36	36	33	kPa
IR	Low noise setting up (AS)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	
A35W7	Cooling capacity	165	183	204	228	256	292	326	372	kW
	Power input	55,6	61,4	69,4	78,8	88,3	100,7	113	130	kW
	<b>EER</b>	<b>2,97</b>	<b>2,98</b>	<b>2,94</b>	<b>2,89</b>	<b>2,90</b>	<b>2,90</b>	<b>2,89</b>	<b>2,86</b>	W/W
	<b>ESEER</b>	<b>4,57</b>	<b>4,59</b>	<b>4,53</b>	<b>4,46</b>	<b>4,46</b>	<b>4,47</b>	<b>4,45</b>	<b>4,41</b>	W/W
	Water flow rate	7,88	8,74	9,75	10,9	12,2	14,0	15,6	17,8	l/s
	Pressure drops	36	33	35	36	36	33	34	31	kPa
IR	eXtra low noise setting up (AX)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	
A35W7	Cooling capacity	162	180	199	223	251	286	320	364	kW
	Power input	56,3	62,2	70,4	80,1	89,4	102	114	132	kW
	<b>EER</b>	<b>2,88</b>	<b>2,89</b>	<b>2,83</b>	<b>2,78</b>	<b>2,81</b>	<b>2,80</b>	<b>2,82</b>	<b>2,77</b>	W/W
	<b>ESEER</b>	<b>4,66</b>	<b>4,69</b>	<b>4,58</b>	<b>4,51</b>	<b>4,55</b>	<b>4,53</b>	<b>4,56</b>	<b>4,48</b>	W/W
	Water flow rate	7,74	8,60	9,51	10,7	12,0	13,7	15,3	17,4	l/s
	Pressure drops	34	32	33	35	35	32	32	29	kPa
IP	Base setting up (AB)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	
A35W7	Cooling capacity	169	187	208	234	266	301	339	385	kW
	Power input	52,7	58,0	65,3	73,3	83,2	94,0	106	121	kW
	<b>EER</b>	<b>3,22</b>	<b>3,23</b>	<b>3,19</b>	<b>3,19</b>	<b>3,20</b>	<b>3,20</b>	<b>3,20</b>	<b>3,18</b>	W/W
	<b>ESEER</b>	<b>4,50</b>	<b>4,52</b>	<b>4,46</b>	<b>4,47</b>	<b>4,48</b>	<b>4,48</b>	<b>4,48</b>	<b>4,45</b>	W/W
	Water flow rate	8,09	8,95	9,94	11,2	12,7	14,4	16,2	18,4	l/s
	Pressure drops	38	35	36	38	39	35	36	33	kPa
A7W45	Heating capacity	176	196	218	242	279	316	351	401	kW
	Power input	52,6	59,9	66,7	74,6	85,9	97	107	124	kW
	<b>COP</b>	<b>3,34</b>	<b>3,28</b>	<b>3,27</b>	<b>3,24</b>	<b>3,25</b>	<b>3,26</b>	<b>3,28</b>	<b>3,23</b>	W/W
	Water flow rate	8,39	9,37	10,4	11,6	13,3	15,1	16,8	19,2	l/s
Pressure drops	41	38	40	41	43	39	39	36	kPa	
IP	Low noise setting up (AS)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	
A35W7	Cooling capacity	163	180	200	225	255	289	325	370	kW
	Power input	55,6	61,4	69,2	77,9	87,9	99,6	113	129	kW
	<b>EER</b>	<b>2,93</b>	<b>2,93</b>	<b>2,89</b>	<b>2,89</b>	<b>2,90</b>	<b>2,90</b>	<b>2,88</b>	<b>2,87</b>	W/W
	<b>ESEER</b>	<b>4,51</b>	<b>4,51</b>	<b>4,45</b>	<b>4,45</b>	<b>4,47</b>	<b>4,47</b>	<b>4,44</b>	<b>4,42</b>	W/W
	Water flow rate	7,79	8,60	9,56	10,75	12,2	13,8	15,5	17,7	l/s
	Pressure drops	35	32	34	35	36	32	33	30	kPa
A7W45	Heating capacity	169	188	209	232	268	303	337	385	kW
	Power input	49,6	56,5	63,0	70,5	81,0	91,3	101	117	kW
	<b>COP</b>	<b>3,41</b>	<b>3,33</b>	<b>3,32</b>	<b>3,29</b>	<b>3,31</b>	<b>3,32</b>	<b>3,35</b>	<b>3,29</b>	W/W
	Water flow rate	8,07	8,98	9,99	11,1	12,8	14,5	16,1	18,4	l/s
Pressure drops	37	35	37	37	40	36	36	33	kPa	
IP	eXtra low noise setting up (AX)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	
A35W7	Cooling capacity	159	176	196	220	250	283	319	362	kW
	Power input	56,3	62,2	70,3	79,2	89,0	101	114	131	kW
	<b>EER</b>	<b>2,82</b>	<b>2,83</b>	<b>2,79</b>	<b>2,78</b>	<b>2,81</b>	<b>2,80</b>	<b>2,81</b>	<b>2,77</b>	W/W
	<b>ESEER</b>	<b>4,58</b>	<b>4,58</b>	<b>4,52</b>	<b>4,50</b>	<b>4,55</b>	<b>4,54</b>	<b>4,55</b>	<b>4,49</b>	W/W
	Water flow rate	7,60	8,41	9,36	10,51	11,9	13,5	15,2	17,3	l/s
	Pressure drops	33	31	32	34	34	31	32	29	kPa
A7W45	Heating capacity	167	186	207	230	265	300	333	381	kW
	Power input	48,0	54,8	61,1	68,5	78,4	89	98	113	kW
	<b>COP</b>	<b>3,48</b>	<b>3,39</b>	<b>3,39</b>	<b>3,36</b>	<b>3,38</b>	<b>3,39</b>	<b>3,40</b>	<b>3,39</b>	W/W
	Water flow rate	7,98	8,89	9,89	11,0	12,7	14,3	15,9	18,2	l/s
Pressure drops	37	34	36	37	39	35	35	32	kPa	

Data declared according to **EN 14511**. The values are referred to units without options and accessories.  
**EER** (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit  
**COP** (Coefficient Of Performance) = ratio of the total heating capacity to the effective power input of the unit

**ESEER** (European Seasonal Energy Efficiency Ratio)  
 = Unit in **A CLASS**.

**A35W7** = source : air in 35°C d.b. / plant : water in 12°C out 7°C  
**A35W18** = source : air in 35°C d.b. / plant : water in 23°C out 18°C  
**A7W45** = source : air in 7°C d.b. 6°C w.b. / plant : water in 40°C out 45°C  
**A7W35** = source : air in 7°C d.b. 6°C w.b. / plant : water in 30°C out 35°C

**Acoustic performances**

Base setting up (AB)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	
Sound power level <sup>(E)</sup>	91	92	92	92	93	94	94	95	dB(A)
Sound pressure level at 1 meter	72	73	73	73	74	75	74	75	dB(A)
Sound pressure level at 5 meters	64	65	65	65	66	67	67	68	dB(A)
Sound pressure level at 10 meters	59	60	60	60	61	62	62	63	dB(A)
Low noise setting up (AS)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	
Sound power level <sup>(E)</sup>	85	86	86	86	87	88	88	89	dB(A)
Sound pressure level at 1 meter	66	67	67	67	68	69	68	69	dB(A)
Sound pressure level at 5 meters	58	59	59	59	60	61	61	62	dB(A)
Sound pressure level at 10 meters	53	54	54	54	55	56	56	57	dB(A)
eXtra low noise setting up (AX)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	
Sound power level <sup>(E)</sup>	82	83	83	83	84	85	85	86	dB(A)
Sound pressure level at 1 meter	63	64	64	64	65	66	65	66	dB(A)
Sound pressure level at 5 meters	55	56	56	56	57	58	58	59	dB(A)
Livello di pressione sonora a 10 metri	50	51	51	51	52	53	53	54	dB(A)

(E): EUROVENT certified data

The acoustic performances are referred to units operating in cooling mode at nominal conditions A35W7.

Unit placed in free field on reflecting surface (directional factor equal to 2).

The sound power level is measured according to ISO 9614 standard.

The sound pressure level is calculated according to ISO 3744 and is referred to a distance of 1/5/10 metres from the external surface of the unit.

**Technical data**

Unit	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	
Power supply	400 - 3 - 50								V-ph-Hz
Compressor type	scroll								-
N° compressors / N° refrigerant circuits	4 / 2								n°
Plant side heat exchanger type	stainless steel brazed plates								-
Source side heat exchanger type	finned coil								-
Fans type	axial								-
N° fans	4					6		8	n°
Tank volume	325				710				l
Hydraulic fittings	3" VICTAULIC				4" VICTAULIC				-

**Electrical data**

Standard unit	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	
<b>FLA</b> - Full load current at maximum tolerated conditions	140	151	177	193	217	243	269	314	A
<b>FLI</b> - Full load power input at maximum tolerated conditions	76	87	107	118	133	148	163	186	kW
<b>MIC</b> - Maximum instantaneous current of the unit	283	340	347	355	379	469	495	510	A
<b>MIC SS</b> - Maximum instantaneous current of the unit with soft starter options	213	250	263	271	295	354	380	404	A
Unit with high head modulating pump	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	
<b>FLA</b> - Full load current at maximum tolerated conditions	149	160	187	203	227	256	282	327	A
<b>FLI</b> - Full load power input at maximum tolerated conditions	81	91	113	124	139	156	171	194	kW
<b>MIC</b> - Maximum instantaneous current of the unit	292	348	357	365	389	482	508	524	A
<b>MIC SS</b> - Maximum instantaneous current of the unit with soft starter options	222	258	273	281	305	368	394	417	A

**Operative range**

Temperature	Unit type	Cooling		Heating		
		min	max	min	max	
Outdoor air inlet temperature	IR, BR, IP, BP	-10*	52**	-15	40*	(°C)
Water outlet temperature	IR, IP	5	25	30	55	(°C)
Water outlet temperature	BR, BP	-12	5	30	55	(°C)
Water outlet temperature (VD)	IR, BR, IP, BP	30	70	30	70	(°C)
Water outlet temperature (VR)	IR, BR	30	55	-	-	(°C)

\* with fans modulating control option (condensation / evaporation control)

\*\* with ATC outdoor high temperature protection function

## VD and VR versions

These units allow to recover the heating power, otherwise wasted on air, through an additional heat exchanger.

The **Desuperheater Version (VD)** allow the hot water production at temperatures between 30 and 70°C through the partial heat recovery of the condensation heat.

The **Total Recovery Version (VR)** allows the cold water production and, at the same time, the hot water production at temperatures between 30 and 55°C through the total recovery of the condensation heat.

### Desupeheater Version (VD) - NET NOMINAL performances

IR	Base setting up (AB)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	
A35W7 - W45	Cooling capacity	177	197	218	244	275	312	350	398	kW
	Total power input	53,1	58,5	66,1	74,7	84,5	96	106	123	kW
	<b>EER</b>	<b>3,33</b>	<b>3,36</b>	<b>3,30</b>	<b>3,27</b>	<b>3,25</b>	<b>3,24</b>	<b>3,29</b>	<b>3,22</b>	<b>W/W</b>
	<b>HRE</b>	<b>4,18</b>	<b>4,22</b>	<b>4,17</b>	<b>4,15</b>	<b>4,10</b>	<b>4,11</b>	<b>4,17</b>	<b>4,09</b>	<b>W/W</b>
	Water flow rate	8,55	9,49	10,5	11,8	13,3	15,1	16,9	19,2	l/s
	Water pressure drop	62	63	69	66	71	74	63	68	kPa
	Heating recovery capacity	45,0	50,3	57,6	66,2	72,0	83,4	94,0	107	kW
	Water flow rate recovery	2,15	2,40	2,75	3,16	3,44	3,98	4,49	5,11	l/s
	Water pressure drop recovery	5	6	8	10	12	16	20	26	kPa

IP	Base setting up (AB)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	
A35W7 - W45	Cooling capacity	174	193	214	241	274	309	349	396	kW
	Total power input	53,0	58,4	65,9	73,8	84,1	95	106	122	kW
	<b>EER</b>	<b>3,29</b>	<b>3,31</b>	<b>3,25</b>	<b>3,26</b>	<b>3,25</b>	<b>3,25</b>	<b>3,28</b>	<b>3,23</b>	<b>W/W</b>
	<b>HRE</b>	<b>4,14</b>	<b>4,17</b>	<b>4,12</b>	<b>4,15</b>	<b>4,11</b>	<b>4,12</b>	<b>4,16</b>	<b>4,10</b>	<b>W/W</b>
	Water flow rate	8,42	9,31	10,34	11,6	13,2	15,0	16,8	19,1	l/s
	Water pressure drop	60	61	67	64	70	73	62	67	kPa
	Heating recovery capacity	45,0	50,3	57,5	65,4	71,6	82,3	94,0	106	kW
	Water flow rate recovery	2,15	2,40	2,75	3,12	3,42	3,93	4,49	5,06	l/s
	Water pressure drop recovery	5	6	8	10	12	16	20	26	kPa

### Total Recovery Version (VR) - NET NOMINAL performances

IR	Base setting up (AB)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	
A35W7 - W45	Cooling capacity	179	198	220	246	277	315	353	402	kW
	Total power input	45,5	50,8	58,4	66,9	73,1	84,8	95	108	kW
	<b>EER</b>	<b>3,93</b>	<b>3,91</b>	<b>3,77</b>	<b>3,68</b>	<b>3,79</b>	<b>3,72</b>	<b>3,72</b>	<b>3,72</b>	<b>W/W</b>
	<b>HRE</b>	<b>8,81</b>	<b>8,77</b>	<b>8,50</b>	<b>8,32</b>	<b>8,54</b>	<b>8,39</b>	<b>8,40</b>	<b>8,38</b>	<b>W/W</b>
	Water flow rate	8,63	9,58	10,6	11,9	13,4	15,3	17,1	19,4	l/s
	Water pressure drop	64	64	70	67	72	76	65	69	kPa
	Heating recovery capacity	222	247	276	310	347	396	444	505	kW
	Water flow rate recovery	10,6	11,8	13,2	14,8	16,6	18,9	21,2	24,1	l/s
	Water pressure drop recovery	49	47	48	47	49	51	51	53	kPa

Data declared according to EN 14511. The values are referred to units without options and accessories.

**EER** (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit

**HRE** (Heat Recovery Efficiency) = ratio of the total capacity of the system (heating plus cooling capacity) to the effective power input

**A35W7 - W45** = source : air in 35°C d.b. / plant : water in 12°C out 7°C / Recovery : water in 40°C out 45°C


## CONTROL SYSTEM

The units are equipped with a controller designed to ensure energy saving and unit efficiency. Available functions :

- ATC outdoor high temperature protection function
- Dynamic defrost
- Sound management
- Climatic control in heating and in cooling mode
- Double set point function
- Demand limit
- Integrative heating
- Remote stand by
- Remote cooling-heating



## DIMENSIONS - MINIMUM OPERATING AREA - WEIGHT

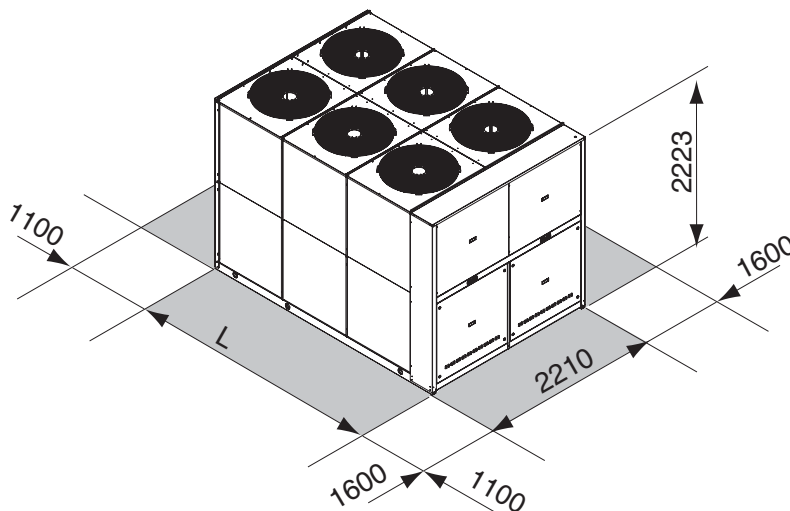

	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	
L	3164	3164	3164	3164	3164	4097	4097	4097	mm
Operating maximum weight*	2512	2712	2957	3122	3214	3787	3948	4046	kg

\* Weight refers to the unit IP with tank and pumping module 2 pumps.



# > RLA ST

## AIR-WATER CHILLERS AND HEAT PUMPS FOR OUTDOOR INSTALLATION



### Available range

#### Unit type

IR	Chiller
IP	Heat pump (reversible on the refrigerant side)
BR	Chiller Brine
BP	Heat pump Brine (reversible on the refrigerant side)

#### Version

VB	Base version
VD	Desuperheater version (with plate heat exchanger)
VR	Total recovery version (with plate heat exchanger)

#### Acoustic setting up

AB	Base setting up
AS	Low noise setting up
AX	eXtra low noise setting up

#### Source temperature level

M	Medium temperature level
A	High temperature level

### Unit description

This series of air-water chillers and heat pumps satisfies the cooling and heating requirements of residential plants of medium-large size.

All the units are suitable for outdoor installation and can be applied to fan coil plants, radiant floor plants and high efficiency radiators plants.

The refrigerant circuit, contained in a compartment protected from the air flow to simplify the maintenance operations, is equipped with scroll compressors mounted on damper supports, shell and tube heat exchanger with threaded or victaulic fittings (according to the model),

electronic expansion valve, reverse cycle valve, dehydrator filter, axial fans with safety protection grilles, finned coil made of copper pipes and aluminium louvered fins with subcooling section. The circuit is protected by a safety gas valve, high and low pressure switches and differential pressure switch on the heat exchanger. The heat exchanger and all the hydraulic pipes are thermally insulated in order to avoid condensate generation and to reduce thermal losses.

All the units can be equipped with variable speed fans control that allows the units to operate with low outdoor temperatures in cooling and high outdoor temperature in heating and permits to reduce noise emissions in such operating conditions.

The low noise acoustic setting up (AS) is obtained, starting from the base setting up (AB), reducing the rotational speed of the fans and mounting sound jackets on the compressors and the technical compartment is clad with soundproofing material of suitable thickness.

The eXtra low noise acoustic setting up (AX) is obtained, starting from the low noise setting up (AS), further reducing the rotational speed of the fans and using finned coil with bigger surface.

All the units are supplied with a management and control electrical panel containing general switch, phase presence and correct sequence controller, microprocessor controller with display and all the other electrical components with IP54 minimum protection degree.

All the units are accurately built and individually tested in the factory. Only electric and hydraulic connections are required for installation.

### Options

**Storing module** available in the configurations :

- 1 or 2 pumps
- standard or high head pump
- [Refrigerant circuit pressures visualization](#)
- high and low pressure gauges
- high and low pressure transducers

[High temperature thermostat](#)

[Compressor starting](#)

- standard (contactors)
- soft starter

[Fans control](#)

- on-off control
- modulating control (condensation / evaporation control)

[Compressor power factor correction](#)

[Electrical load protection](#)

- fuses
- thermal magnetic circuit breakers

[Coil condensate tray](#)

### Accessories

[Rubber vibration dampers](#)

[Spring vibration dampers](#)

[Coil protection grilles](#)

[Remote control](#)

[Modbus serial interface on RS485](#)

[Programmer clock](#)

[Phase sequence and voltage controller](#)

[Water flow switch](#)

[Victaulic hydraulic fittings](#)

**NET NOMINAL performances - Standard plants - EUROVENT certified data**

IR	Base setting up (AB)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4		
A35W7	Cooling capacity	161	178	199	228	255	289	323	368	409	kW	
	Power input	56,2	62,7	70,9	80,4	90,7	103	115	130	146	kW	
	EER	<b>2,86</b>	<b>2,84</b>	<b>2,81</b>	<b>2,84</b>	<b>2,81</b>	<b>2,81</b>	<b>2,81</b>	<b>2,81</b>	<b>2,83</b>	<b>2,80</b>	W/W
	ESEER	<b>3,84</b>	<b>3,81</b>	<b>3,79</b>	<b>3,82</b>	<b>3,79</b>	<b>3,80</b>	<b>3,79</b>	<b>3,80</b>	<b>3,80</b>	<b>3,79</b>	W/W
	Water flow rate	7,74	8,55	9,60	11,0	12,3	14,0	15,6	17,7	19,7	l/s	
	Pressure drops	50	61	36	46	56	52	31	37	48	kPa	
IR	Low noise setting up (AS)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4		
A35W7	Cooling capacity	155	171	191	219	245	277	311	353	393	kW	
	Power input	59,2	66,1	75,0	85,2	95,5	109	121	137	154	kW	
	EER	<b>2,62</b>	<b>2,59</b>	<b>2,55</b>	<b>2,57</b>	<b>2,57</b>	<b>2,54</b>	<b>2,57</b>	<b>2,58</b>	<b>2,55</b>	W/W	
	ESEER	<b>3,85</b>	<b>3,80</b>	<b>3,77</b>	<b>3,80</b>	<b>3,79</b>	<b>3,76</b>	<b>3,78</b>	<b>3,80</b>	<b>3,76</b>	W/W	
	Water flow rate	7,45	8,22	9,22	10,6	11,8	13,4	15,0	17,0	18,9	l/s	
	Pressure drops	46	57	33	43	52	48	29	35	44	kPa	
IR	eXtra low noise setting up (AX)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4		
A35W7	Cooling capacity	151	167	187	214	240	272	304	346	385	kW	
	Power input	59,8	66,9	76,0	86,4	96,6	111	123	138	157	kW	
	EER	<b>2,53</b>	<b>2,50</b>	<b>2,46</b>	<b>2,48</b>	<b>2,48</b>	<b>2,45</b>	<b>2,47</b>	<b>2,51</b>	<b>2,45</b>	W/W	
	ESEER	<b>3,90</b>	<b>3,85</b>	<b>3,82</b>	<b>3,84</b>	<b>3,86</b>	<b>3,82</b>	<b>3,82</b>	<b>3,88</b>	<b>3,81</b>	W/W	
	Water flow rate	7,26	8,03	9,03	10,3	11,6	13,1	14,6	16,7	18,5	l/s	
	Pressure drops	44	54	32	40	50	45	28	33	42	kPa	
IP	Base setting up (AB)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4		
A35W7	Cooling capacity	154	171	192	215	244	275	310	357	397	kW	
	Power input	55,4	61,8	69,6	78,5	89,9	102	113	129	144	kW	
	EER	<b>2,78</b>	<b>2,77</b>	<b>2,76</b>	<b>2,74</b>	<b>2,71</b>	<b>2,70</b>	<b>2,74</b>	<b>2,77</b>	<b>2,76</b>	W/W	
	ESEER	<b>3,72</b>	<b>3,70</b>	<b>3,72</b>	<b>3,68</b>	<b>3,65</b>	<b>3,65</b>	<b>3,66</b>	<b>3,72</b>	<b>3,73</b>	W/W	
	Water flow rate	7,41	8,22	9,27	10,4	11,8	13,3	14,9	17,2	19,2	l/s	
	Pressure drops	46	57	33	41	52	47	29	35	45	kPa	
A7W45	Heating capacity	169	191	215	240	273	308	345	395	439	kW	
	Power input	56,8	64,0	72,3	81,2	92,7	104	116	132	147	kW	
	COP	<b>2,98</b>	<b>2,98</b>	<b>2,97</b>	<b>2,96</b>	<b>2,94</b>	<b>2,96</b>	<b>2,97</b>	<b>2,99</b>	<b>2,99</b>	W/W	
	Water flow rate	8,03	9,03	10,2	11,4	12,9	14,6	16,3	18,7	20,8	l/s	
Pressure drops	54	68	40	49	62	56	34	42	53	kPa		
IP	Low noise setting up (AS)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4		
A35W7	Cooling capacity	148	164	185	206	234	265	298	343	382	kW	
	Power input	58,3	65,2	73,6	86,4	94,7	107	123	136	152	kW	
	EER	<b>2,54</b>	<b>2,52</b>	<b>2,51</b>	<b>2,38</b>	<b>2,47</b>	<b>2,48</b>	<b>2,42</b>	<b>2,52</b>	<b>2,51</b>	W/W	
	ESEER	<b>3,72</b>	<b>3,69</b>	<b>3,69</b>	<b>3,51</b>	<b>3,64</b>	<b>3,63</b>	<b>3,55</b>	<b>3,73</b>	<b>3,70</b>	W/W	
	Water flow rate	7,12	7,88	8,89	9,94	11,3	12,8	14,3	16,5	18,4	l/s	
	Pressure drops	42	52	31	37	47	43	26	33	42	kPa	
A7W45	Heating capacity	162	183	206	230	262	296	331	379	422	kW	
	Power input	53,5	60,3	68,2	76,6	87,3	99	110	125	140	kW	
	COP	<b>3,03</b>	<b>3,03</b>	<b>3,02</b>	<b>3,00</b>	<b>3,00</b>	<b>2,99</b>	<b>3,01</b>	<b>3,03</b>	<b>3,01</b>	W/W	
	Water flow rate	7,69	8,65	9,75	10,9	12,4	14,0	15,7	17,9	20,0	l/s	
Pressure drops	50	63	37	45	57	52	32	38	49	kPa		
IP	eXtra low noise setting up (AX)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4		
A35W7	Cooling capacity	145	161	181	203	229	259	291	335	374	kW	
	Power input	59,0	66,1	74,6	84,4	95,8	109	122	137	153	kW	
	EER	<b>2,46</b>	<b>2,44</b>	<b>2,43</b>	<b>2,41</b>	<b>2,39</b>	<b>2,38</b>	<b>2,39</b>	<b>2,45</b>	<b>2,44</b>	W/W	
	ESEER	<b>3,79</b>	<b>3,75</b>	<b>3,75</b>	<b>3,71</b>	<b>3,70</b>	<b>3,69</b>	<b>3,69</b>	<b>3,79</b>	<b>3,77</b>	W/W	
	Water flow rate	6,98	7,74	8,70	9,75	11,0	12,5	14,0	16,1	18,0	l/s	
	Pressure drops	41	50	29	36	45	41	25	31	40	kPa	
A7W45	Heating capacity	161	181	204	228	259	293	328	374	417	kW	
	Power input	51,8	58,5	66,2	74,5	84,6	95,6	106	121	135	kW	
	COP	<b>3,11</b>	<b>3,09</b>	<b>3,08</b>	<b>3,06</b>	<b>3,06</b>	<b>3,06</b>	<b>3,09</b>	<b>3,09</b>	<b>3,09</b>	W/W	
	Water flow rate	7,64	8,60	9,65	10,8	12,3	13,9	15,5	17,7	19,7	l/s	
Pressure drops	49	62	36	44	56	51	31	37	48	kPa		

Data declared according to EN 14511. The values are referred to units without options and accessories.

EER (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit

COP (Coefficient Of Performance) = ratio of the total heating capacity to the effective power input of the unit

ESEER (European Seasonal Energy Efficiency Ratio)

A35W7 = source : air in 35°C d.b. / plant : water in 12°C out 7°C

A35W18 = source : air in 35°C d.b. / plant : water in 23°C out 18°C

A7W45 = source : air in 7°C d.b. 6°C w.b. / plant : water in 40°C out 45°C

A7W35 = source : air in 7°C d.b. 6°C w.b. / plant : water in 30°C out 35°C

**Acoustic performances**

Base setting up (AB)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4	
Sound power level	91	92	92	92	93	94	94	95	95	dB(A)
Sound pressure level at 1 meter	72	73	73	73	74	75	74	75	75	dB(A)
Sound pressure level at 5 meters	64	65	65	65	66	67	67	68	68	dB(A)
Sound pressure level at 10 meters	59	60	60	60	61	62	62	63	63	dB(A)
Low noise setting up (AS)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4	
Sound power level	85	86	86	86	87	88	88	89	89	dB(A)
Sound pressure level at 1 meter	66	67	67	67	68	69	68	69	69	dB(A)
Sound pressure level at 5 meters	58	59	59	59	60	61	61	62	62	dB(A)
Sound pressure level at 10 meters	53	54	54	54	55	56	56	57	57	dB(A)
eXtra low noise setting up (AX)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4	
Sound power level	82	83	83	83	84	85	85	86	86	dB(A)
Sound pressure level at 1 meter	63	64	64	64	65	66	65	66	66	dB(A)
Sound pressure level at 5 meters	55	56	56	56	57	58	58	59	59	dB(A)
Livello di pressione sonora a 10 metri	50	51	51	51	52	53	53	54	54	dB(A)

The acoustic performances are referred to units operating in cooling mode at nominal conditions A35W7.

Unit placed in free field on reflecting surface (directional factor equal to 2).

The sound power level is measured according to ISO 9614 standard.

The sound pressure level is calculated according to ISO 3744 and is referred to a distance of 1/5/10 metres from the external surface of the unit.

**Technical data**

Unit	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4	
Power supply	400 - 3 - 50									V-ph-Hz
Compressor type	scroll									-
N° compressors / N° refrigerant circuits	4 / 2									n°
Plant side heat exchanger type	shell and tube									-
Source side heat exchanger type	finned coil									-
Fans type	axial									-
N° fans	4			6			8			n°
Water volume plant side heat exchanger	35.6	35.6	61.5	57.8	57.8	52.8	93.9	87.5	80.2	l
Hydraulic fittings plant side heat exchanger	3" GAS		4" VIC			5" VIC				-

**Electrical data**

Standard unit	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4	
<b>FLA</b> - Full load current at maximum tolerated conditions	140	151	177	193	217	243	269	314	335	A
<b>FLI</b> - Full load power input at maximum tolerated conditions	76	87	107	118	133	148	163	186	200	kW
<b>MIC</b> - Maximum instantaneous current of the unit	283	340	347	355	379	469	495	510	558	A
<b>MIC SS</b> - Maximum instantaneous current of the unit with soft starter options	213	250	263	271	295	354	380	404	438	A
Unit with high head modulating pump	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4	
<b>FLA</b> - Full load current at maximum tolerated conditions	149	160	187	203	227	256	282	327	357	A
<b>FLI</b> - Full load power input at maximum tolerated conditions	81	91	113	124	139	156	171	194	212	kW
<b>MIC</b> - Maximum instantaneous current of the unit	292	348	357	365	389	482	508	524	580	A
<b>MIC SS</b> - Maximum instantaneous current of the unit with soft starter options	222	258	273	281	305	368	394	417	460	A

**Operative range**

Temperature	Unit type	Cooling		Heating		
		min	max	min	max	
Outdoor air inlet temperature	IR, BR, IP, BP	-10*	52**	-10	40*	(°C)
Water outlet temperature	IR, IP	5	15	30	55	(°C)
Water outlet temperature	BR, BP	-12	5	30	55	(°C)
Water outlet temperature (VD)	IR, BR, IP, BP	30	70	30	70	(°C)
Water outlet temperature (VR)	IR, BR	30	55	-	-	(°C)

\* with fans modulating control option (condensation / evaporation control)

\*\* with ATC outdoor high temperature protection function

### VD and VR versions

These units allow to recover the heating power, otherwise wasted on air, through an additional plate heat exchanger.

The **Desuperheater Version (VD)** allow the hot water production at temperatures between 30 and 70°C through the partial heat recovery of the condensation heat.

The **Total Recovery Version (VR)** allows the cold water production and, at the same time, the hot water production at temperatures between 30 and 55°C through the total recovery of the condensation heat.

#### Desupeheater Version (VD) - NET NOMINAL performances

IR	Base setting up (AB)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4	
A35W7 - W45	Cooling capacity	167	185	207	237	264	300	336	382	425	kW
	Total power input	55,0	61,2	69,3	78,5	88,7	101	112	127	143	kW
	<b>EER</b>	<b>3,04</b>	<b>3,01</b>	<b>2,99</b>	<b>3,02</b>	<b>2,98</b>	<b>2,97</b>	<b>3,00</b>	<b>3,01</b>	<b>2,98</b>	W/W
	<b>HRE</b>	<b>3,90</b>	<b>3,89</b>	<b>3,87</b>	<b>3,91</b>	<b>3,85</b>	<b>3,85</b>	<b>3,90</b>	<b>3,88</b>	<b>3,86</b>	W/W
	Water flow rate	8,05	8,89	10,0	11,4	12,8	14,5	16,2	18,4	20,5	l/s
	Water pressure drop	54	66	39	49	61	56	34	40	52	kPa
	Heating recovery capacity	47,2	53,4	61,2	70,3	76,6	88,7	99,9	110,8	126,6	kW
	Water flow rate recovery	2,25	2,55	2,93	3,36	3,66	4,24	4,77	5,29	6,05	l/s
	Water pressure drop recovery	5	7	8	10	13	16	16	21	25	kPa
	IP	Base setting up (AB)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4
A35W7 - W45	Cooling capacity	160	177	200	224	253	286	322	371	413	kW
	Total power input	54,1	60,4	67,9	76,6	87,8	99	111	126	140	kW
	<b>EER</b>	<b>2,96</b>	<b>2,94</b>	<b>2,94</b>	<b>2,92</b>	<b>2,89</b>	<b>2,88</b>	<b>2,91</b>	<b>2,95</b>	<b>2,96</b>	W/W
	<b>HRE</b>	<b>3,82</b>	<b>3,81</b>	<b>3,83</b>	<b>3,82</b>	<b>3,75</b>	<b>3,76</b>	<b>3,81</b>	<b>3,83</b>	<b>3,85</b>	W/W
	Water flow rate	7,70	8,55	9,64	10,8	12,2	13,8	15,5	17,9	19,9	l/s
	Water pressure drop	50	61	36	44	55	50	31	38	49	kPa
	Heating recovery capacity	46,5	52,7	60,1	68,8	76,1	87,5	98,9	109,8	123,7	kW
	Water flow rate recovery	2,22	2,52	2,87	3,29	3,64	4,18	4,73	5,25	5,91	l/s
	Water pressure drop recovery	5	6	8	10	13	16	16	20	24	kPa

#### Total Recovery Version (VR) - NET NOMINAL performances

IR	Base setting up (AB)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4	
A35W7 - W45	Cooling capacity	169	186	209	239	267	303	339	386	429	kW
	Total power input	47,3	53,5	61,6	70,7	77,2	89,5	100	111	127	kW
	<b>EER</b>	<b>3,56</b>	<b>3,48</b>	<b>3,39</b>	<b>3,38</b>	<b>3,46</b>	<b>3,39</b>	<b>3,38</b>	<b>3,46</b>	<b>3,37</b>	W/W
	<b>HRE</b>	<b>8,08</b>	<b>7,91</b>	<b>7,75</b>	<b>7,71</b>	<b>7,87</b>	<b>7,72</b>	<b>7,71</b>	<b>7,87</b>	<b>7,69</b>	W/W
	Water flow rate	8,13	8,98	10,1	11,5	12,9	14,6	16,4	18,6	20,7	l/s
	Water pressure drop	55	68	40	50	62	56	35	41	53	kPa
	Heating recovery capacity	214	237	268	306	340	388	434	492	550	kW
	Water flow rate recovery	10,2	11,3	12,8	14,6	16,2	18,5	20,7	23,5	26,3	l/s
	Water pressure drop recovery	35	49	41	45	50	48	52	47	52	kPa

Data declared according to EN 14511. The values are referred to units without options and accessories.

**EER** (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit

**HRE** (Heat Recovery Efficiency) = ratio of the total capacity of the system (heating plus cooling capacity) to the effective power input

**A35W7 - W45** = source : air in 35°C d.b. / plant : water in 12°C out 7°C / Recovery : water in 40°C out 45°C


### CONTROL SYSTEM

The units are equipped with a controller designed to ensure energy saving and unit efficiency. Available functions :

- ATC outdoor high temperature protection function
- Dynamic defrost
- Sound management
- Climatic control in heating and in cooling mode
- Double set point function
- Demand limit
- Integrative heating
- Remote stand by
- Remote cooling-heating



### DIMENSIONS - MINIMUM OPERATING AREA - WEIGHT

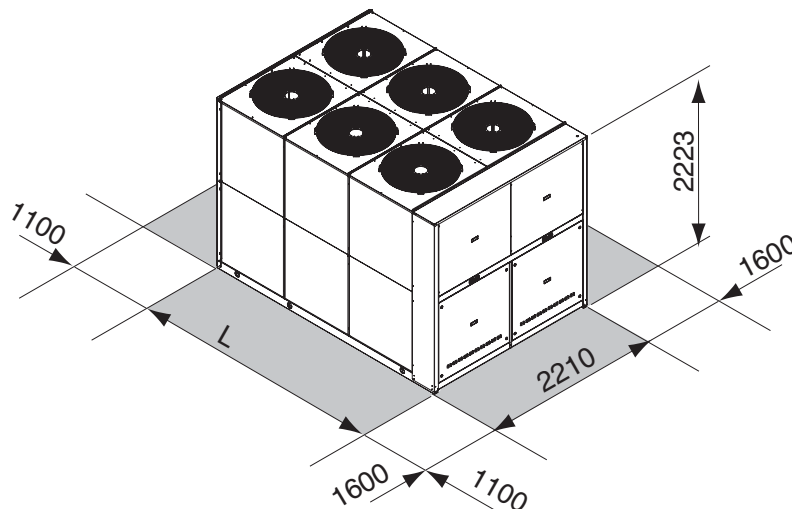

	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4	
L	3164	3164	3164	3164	3164	3164	4097	4097	4097	mm
Operating maximum weight*	2157	2346	2644	2815	2885	2901	3182	3292	3357	kg

\* Weight refers to the unit IP complete with 2 pumps module without tank.